



## Bottom View

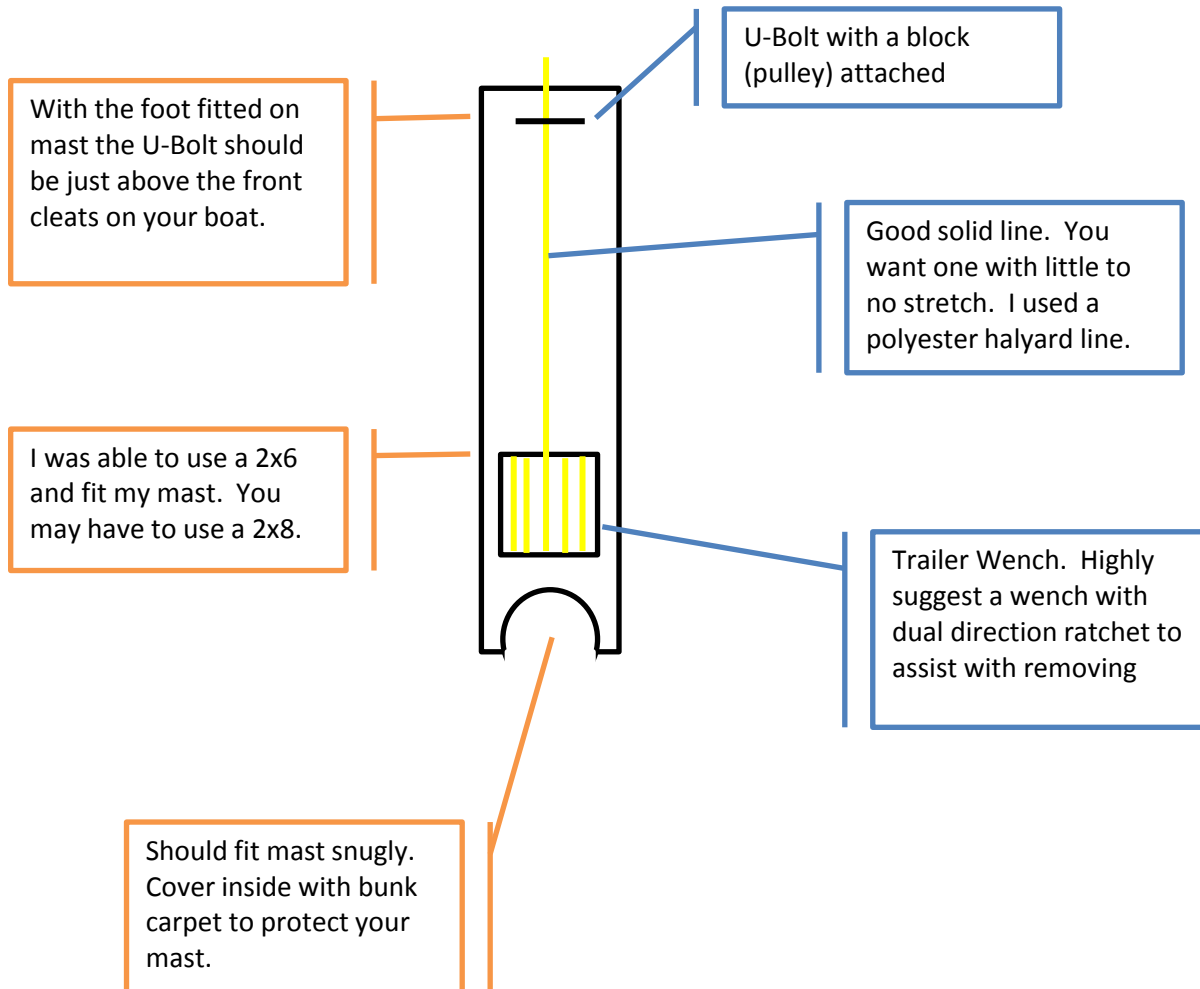

## Side View

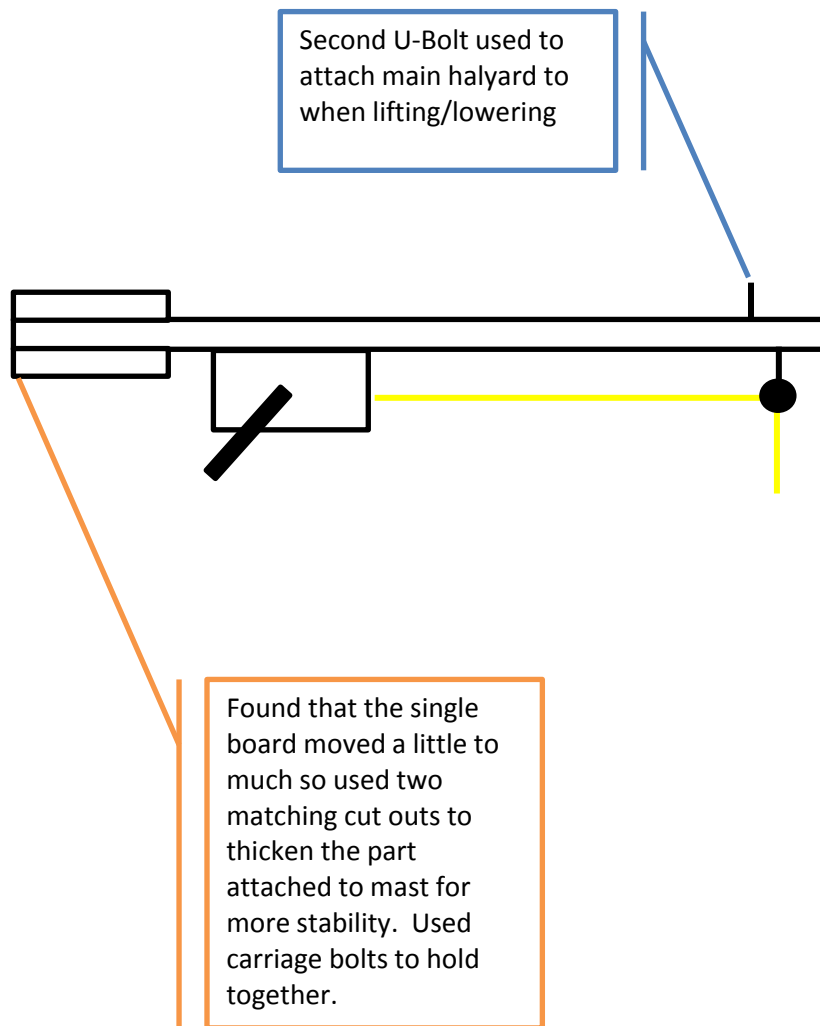


## Raising the Mast

Red = Gin Pole

Blue = Mast

Yellow = Line

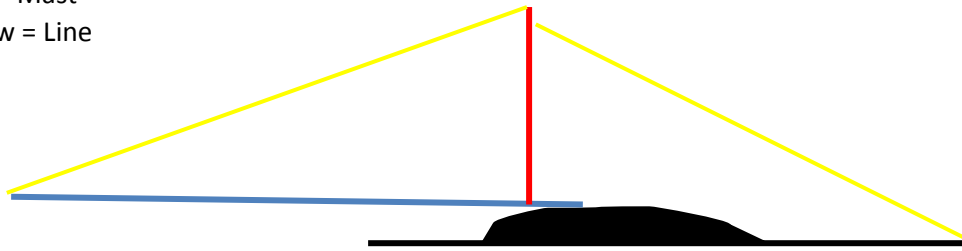

### Set up:

-Place the gin pole perpendicular to the mast as close to the base as you can. Attach the main halyard line to the top u-bolt and secure it to cleats on the mast.

- All your standing rigging except forestay should be attached (backstay and shrouds). All running rigging including jib halyard or spinnaker halyard are run and secured.

- I used my bow cleats to secure the line running from the gin pole wench, but running to the trailer is also a option.

- For your forestay or furling system I walked it forward as I wenched up. Others have attached it to the gin pole but I did not like that option.

### Lift:

- As you start to crank up and lift you will have a lot of port/starboard give until you are almost up. Exercise extreme care while lifting and employee additional help.

### Forestay and Complete:

- Once stepped you just need to secure your forestay (or furling system) to the stepping. You can then un-attach the gin pole and store it until un-stepping. I always found I needed someone to give just a bit of pressure fore on the mast to get the forestay attached.