


REPLACING SAIL TIES WITH PERMANENTLY INSTALLED BUNGEE CORD

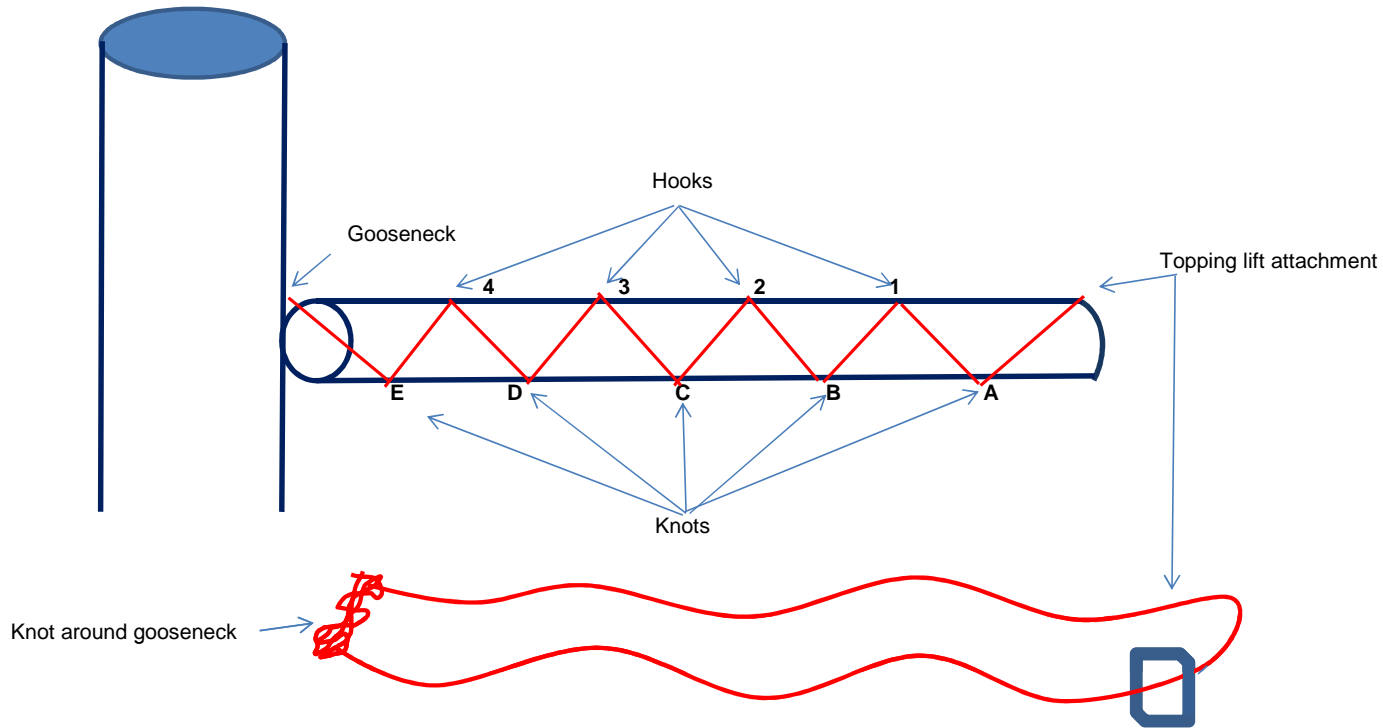

Bungee cord twice as long as boom + 1 or 2 feet (to be adjusted as needed once installed around sail)

- 1 - Run bungee cord through topping lift attachment at the end of the boom and bring both ends towards gooseneck with bungee hanging loose on either side of boom.
 - 2 - Tie both sides together under the boom about 1' from end of boom. At Position A
 - 3 - From knot on Position A, mark bungee evenly to create 4 equal length loops going towards mast end of the boom
 - 4 - Insert a plastic hook on 1 side (with hook facing up when on top of boom) and tie knot in Position B
 - 5 - Repeat with other 3 hooks on same side and knots in position C, D, & E
 - 6 - Tie knot around gooseneck.
- NB** You may need to adjust loops according to your sail and how it folds on the boom

When I drop the sail, I start folding at the boom end, reaching over and bringing both sides of bungee loops over top of sail to set plastic hooks. It does work with lazy jacks as well. Just make sure the bungee cord is set between the lazy jacks and the boom.

When ready to hoist sail, just undo the hooks and let go. The bungee loops will stay in line under the boom ready to use when dropping sail down.