


FF2 PARTS LIST

The FF2 luff extrusion has two grooves, one facing forward (for the halyard) and one facing aft (for the sail). The extrusion measures .6" x 1.4". The diameter of the cup and spool is 4".

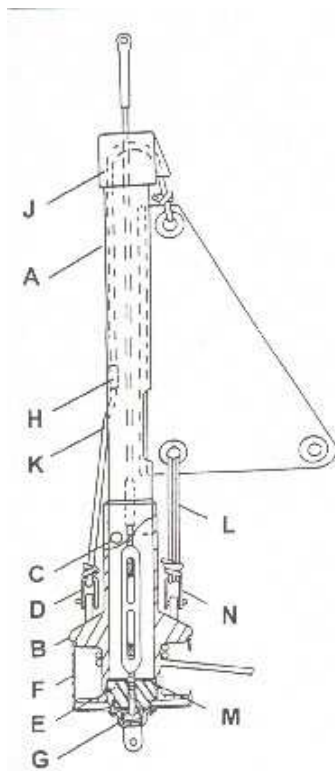

Ref.	Description	Part #	Price
A	Luff Extrusion	LFF2	200
B	Spool Assembly	2010	147
C	Luff Support Pin (3/16" x 2-1/32")	2009	7
D	Downhaul/Halyard Shackle**	2007	9
	Shackle Pin	1998	6
E	Main Bearing	1033	29
	Ball Bearing	BB2	88
F	Cup (Stainless Steel)	1807	63
G	Antirotaion Strap	1081	12
H	Halyard 1/4" x 34' w/ ferrule*	1932	60
J	Halyard Top Fitting	2011	46
L	Tack Tension Line	11921	4
M	Thrust Washer	1253	11
--	Instruction Manual	1049	--

FF2 Design Changes

* 1997 New Halyard -- The 3/16 rope halyard with molded-on black plastic traveller has been replaced by part # 1932. The new halyard (1932) uses a 1/4" rope with a stainless steel ferrule swaged on. Both halyards function in the same way and are interchangeable.

** 1998 Downhaul/Halyard Shackles -- The eyemount where the halyard is made fast has been replaced by a shackle that stands on the top flange of the spool. The eyemount is still available (part # 1422, \$7).