

• CAM CLEATS SET-UP

A B C D

- A Jib Halyard
- B Jib Halyard (spare)
- C 2nd Reef line
- D Boom Vang

1 2 3 4 5

- 1 Outhaul
- 2 1st Reef line
- 3 Main sheet
- 4 Main Halyard
- 5 Main halyard (spare)

PORT SIDE

A
B
C
D

- A Jib Halyard
- B Jib Halyard (spare)
- C 2nd Reef line
- D Boom Vang

STARBOARD SIDE

- 1 Outhaul
- 2 1st Reef line
- 3 Main sheet
- 4 Main Halyard
- 5 Main halyard (spare)






Spinnaker & Spare Jib halyards

Note 1: Spinnaker halyard is mounted on a bail with block at top of mast and secured near base of mast.

Note 2: Spare jib halyard is run inside mast but outside part and shackle are attached near mast base



Spinnaker sheet led to snatchblock on toe-rail

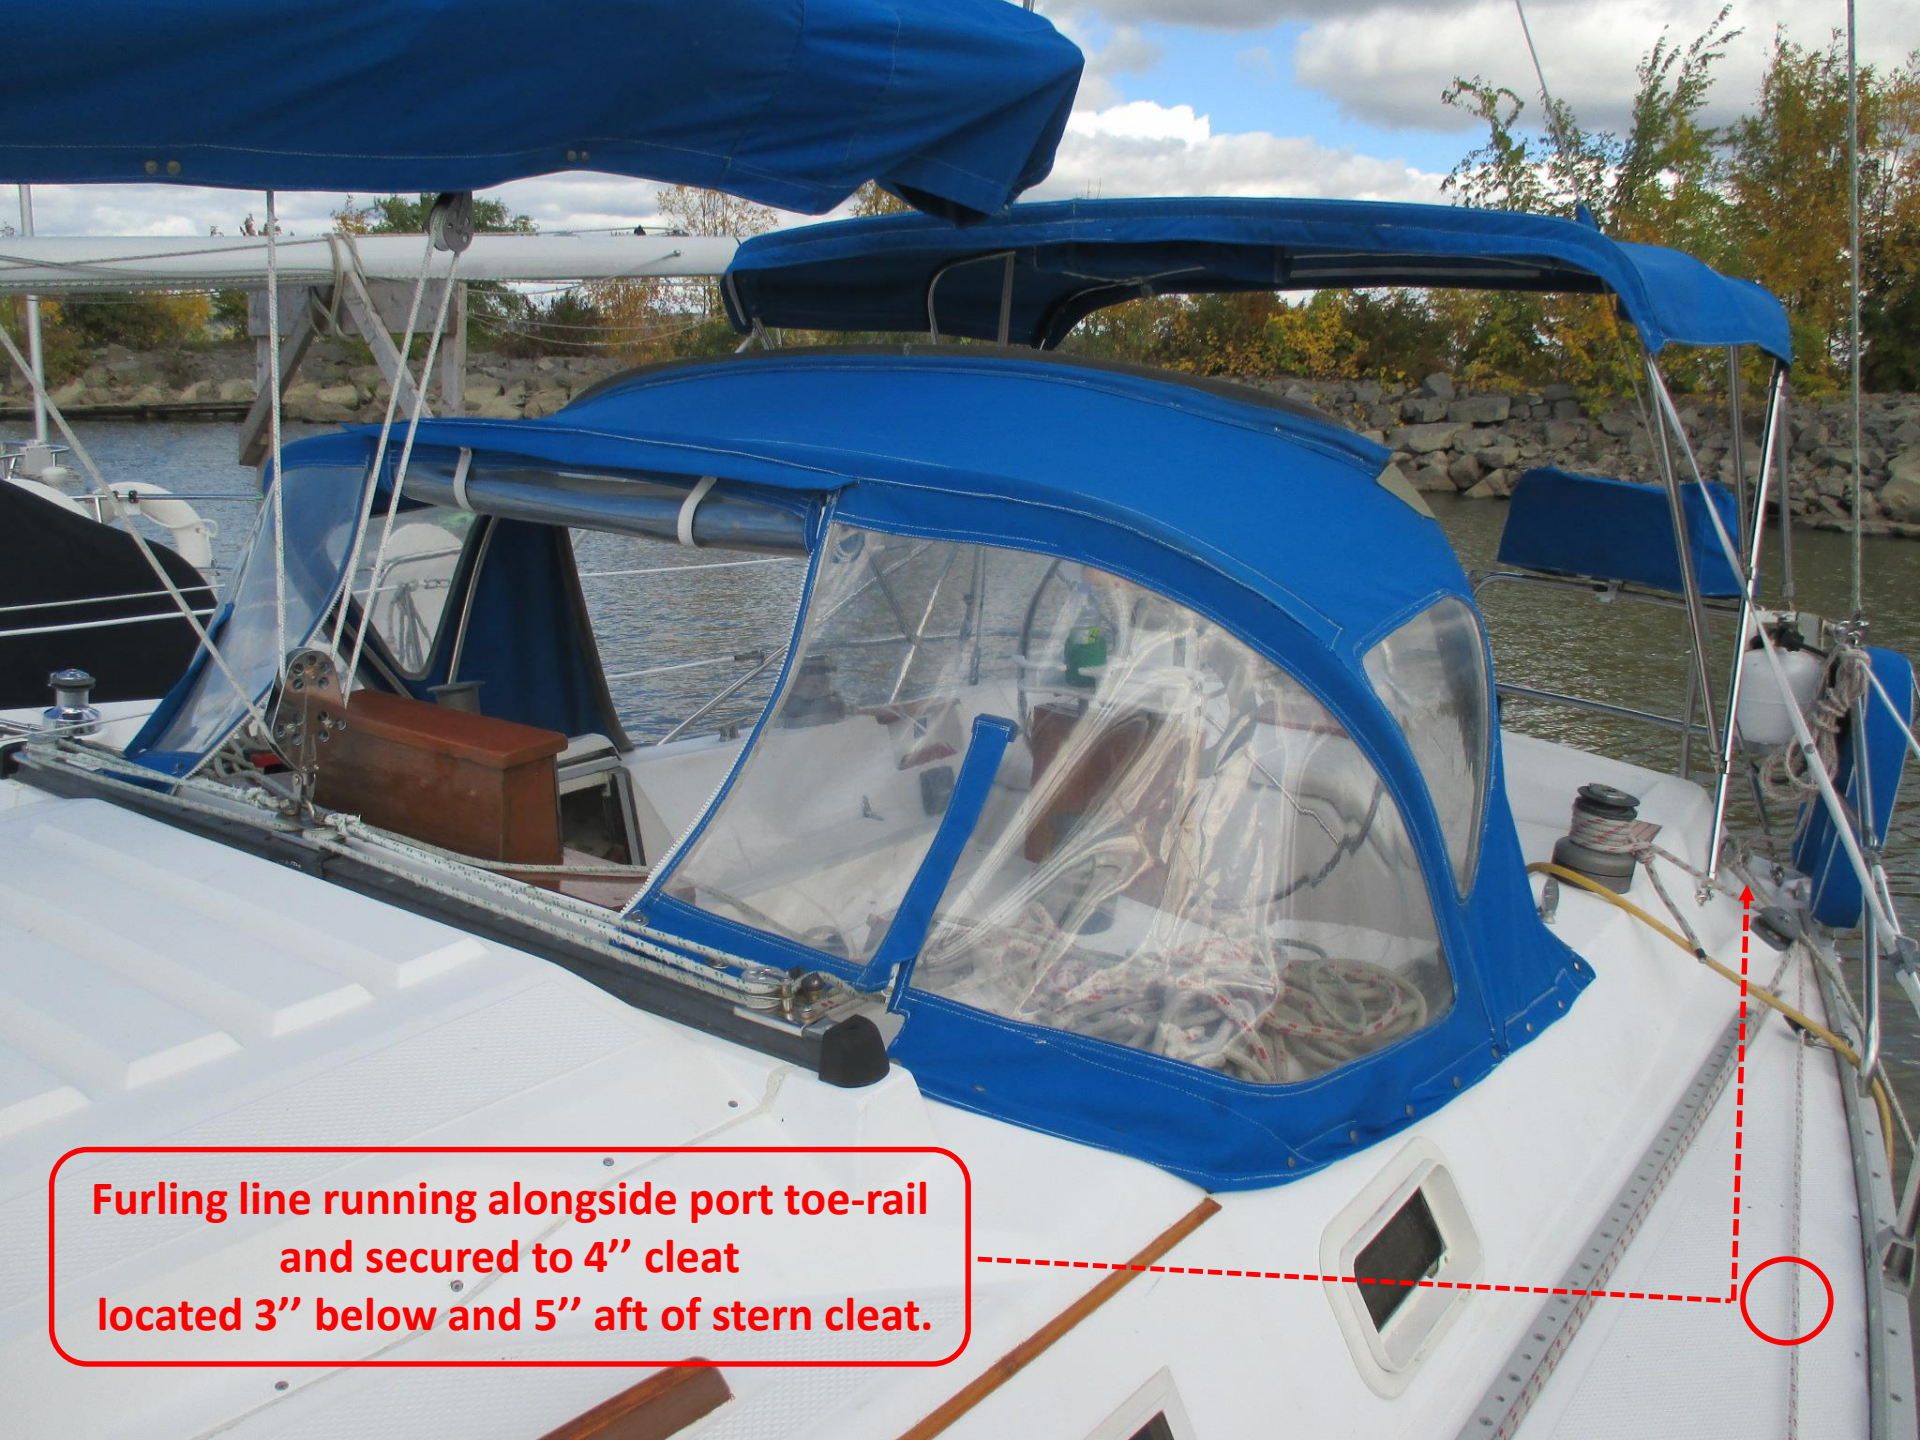

**Furling line running alongside port toe-rail
and secured to 4" cleat
located 3" below and 5" aft of stern cleat.**