

CAUTION: THE CABLE MUST BE MOUNTED TO THE SHIFT LEVER AT A 90° ANGLE TO INSURE EQUAL TRAVEL FROM NEUTRAL TO FORWARD AND NEUTRAL TO REVERSE (See Fig. 13-B).

CAUTION: TRANSMISSION MUST BE LEFT IN NEUTRAL WHEN SAILING, DO NOT LEAVE IN FORWARD GEAR WHEN SAILING WITHOUT POWER AS IT WILL DAMAGE GEAR.

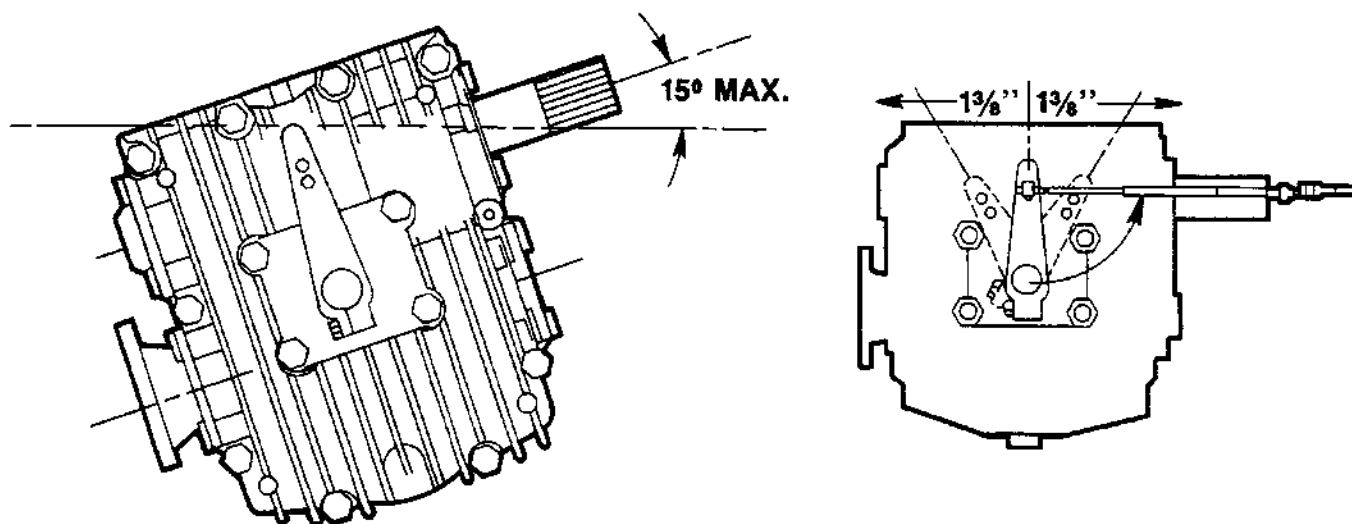


FIGURE 13-A

CAUTION: THE CABLE MUST BE MOUNTED TO THE SHIFT LEVER AT A 90° ANGLE TO INSURE EQUAL TRAVEL FROM NEUTRAL TO FORWARD AND NEUTRAL TO REVERSE (See Fig. 13-B).

CAUTION: TRANSMISSION MUST BE LEFT IN NEUTRAL WHEN SAILING, DO NOT LEAVE IN FORWARD GEAR WHEN SAILING WITHOUT POWER AS IT WILL DAMAGE GEAR.

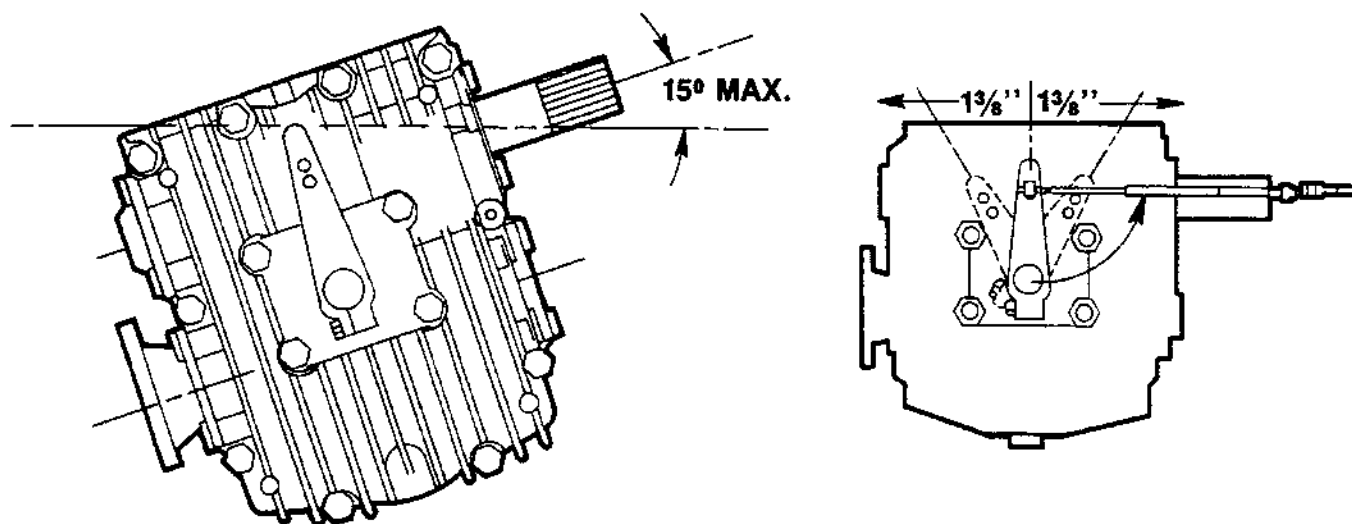


FIGURE 13-A