


HOW TO DEFINE YOUR FLAG HALYARD LENGTH





- At the aft lower shroud, set the **positioning hitch** to center your halyard (without flag) between the mast and the cap shroud.
- Whilst standing next to the shroud, set the **Shroud Button** at eye height, but not higher than 20 cm below the **hitch**.
- Finally adjust your halyard length to make it fit around the **Shroud Button**.

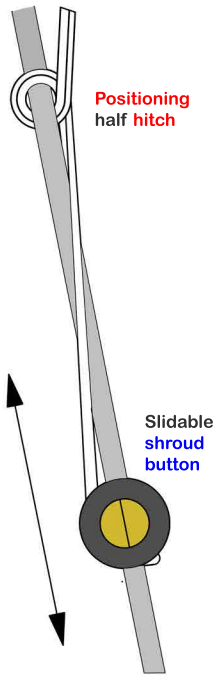

Use 3-4 mm. halyard rope
Preferably 3 mm (1/8") braided polyester.

Maintenance:
Rinse with fresh water.

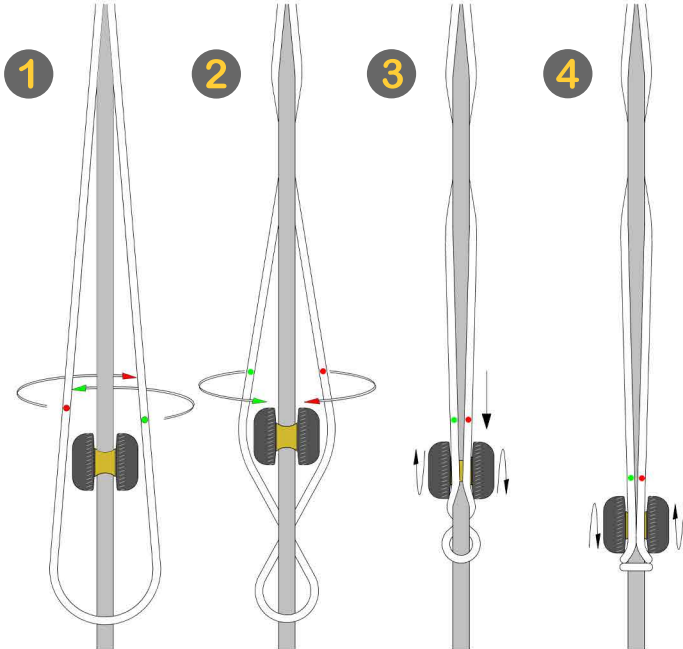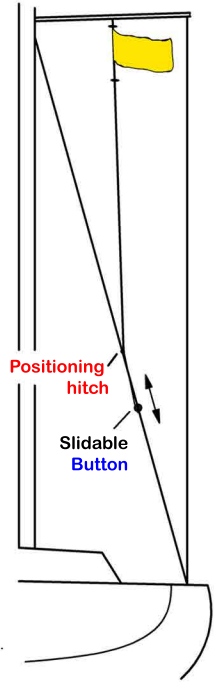

- 1 Cross the halyard loop behind the shroud.
- 2 Pull it forward again and lock it in the button groove.
- 3 Unscrew (1/4 turn) the button.
- 4 Slide it down to tighten the halyard and fasten the button again.

International patents pending

IMPORTANT NOTICE!

When assembling the button, ensure proper alignment of the threaded shroud clamps.



Misalignment of the clamps will cause **serious damage** to the thread of the Delrin nut and will render your button useless.