



(562) 692-5911

(562) 695-2323 (fax)

la.sales@mcmaster.com

Text 75930

## Pan Head Phillips Machine Screws




Screws up to 2" long are fully threaded; those longer than 2" have at least 1 1/2" of thread. Length is measured from under the head.

 For technical drawings and 3-D models, click on a part number.

### 18-8 Stainless Steel

Lg.	Pkg. Qty.		Pkg.
<b>8-32—#2 Drive</b>			
4"	10	<a href="#">91772A217</a>	\$5.47
<b>10-24—#2 Drive</b>			
4"	10	<a href="#">91772A269</a>	5.36
<b>10-32—#2 Drive</b>			
4"	25	<a href="#">91772A850</a>	12.47
4 1/2"	10	<a href="#">91772A854</a>	5.36

## Flat Head Phillips Machine Screws

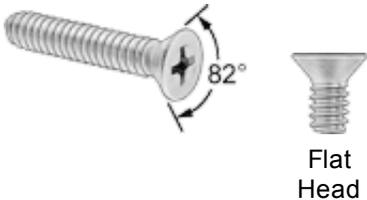

Flat  
Head

Screws have a standard 82° bevel under the head. Sizes noted below have an undercut head to allow more threading. Screws up to 2" long are fully threaded; those longer than 2" have at least 1 1/2" of thread. Length is measured from the top of the head.


 For technical drawings and 3-D models, click on a part number.

### 18-8 Stainless Steel

Lg.	Pkg. Qty.		Pkg.
<b>8-32—#2 Drive</b>			
4"	10	<a href="#">91771A213</a>	\$4.99
<b>10-24—#2 Drive</b>			
4"	10	<a href="#">91771A261</a>	5.43
5"	10	<a href="#">91771A263</a>	11.03

**10-32—#2 Drive**4" 10 [91771A846](#) 4.68

## Flat Head Slotted Machine Screws

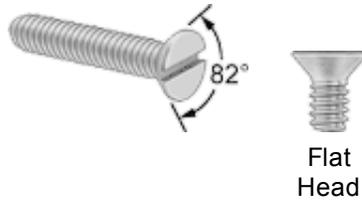


Each screw has an 82° bevel under the head. Sizes noted below have an undercut head to allow more threading. Screws up to 2" long are fully threaded; those longer than 2" have at least 1 1/2" of thread. Length is measured from the top of the head.

 For technical drawings and 3-D models, click on a part number.

### 18-8 Stainless Steel

Lg.	Pkg. Qty.		Pkg.
<b>8-32</b>			
4"	10	<a href="#">91781A215</a>	\$9.10
<b>10-24</b>			
4"	10	<a href="#">91781A261</a>	5.86
5"	5	<a href="#">91781A265</a>	9.50
<b>10-32</b>			
4"	10	<a href="#">91781A846</a>	5.86

## Oval Head Machine Screws

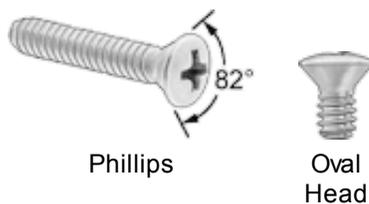

Inch sizes have an 82° beveled head.

Screws up to 2" long are fully threaded; those longer than 2" have at least 1 1/2" of thread. Sizes noted below have an undercut head to allow for more threading. Length is measured from the top of the bevel.

 For technical drawings and 3-D models, click on a part number.

### Phillips—18-8 Stainless Steel

Lg.	Pkg. Qty.		Pkg.
<b>10-24—#2 Drive</b>			
4"	10	<a href="#">91802A261</a>	\$6.09

## Round Head Phillips Machine Screws



Screws up to 2" long are fully threaded; those longer than 2" have at least 1 1/2" of thread. Length is measured from under the head.

 For technical drawings and 3-D models, click on a part number.

### 18-8 Stainless Steel

Lg.	Pkg. Qty.		Pkg.
<b>8-32—#2 Drive</b>			
4"	10	<a href="#">91773A213</a>	\$4.22
<b>10-24—#2 Drive</b>			
4"	10	<a href="#">91773A261</a>	5.81

## Round Head Slotted Machine Screws



Screws up to 2" long are fully threaded; those longer than 2" have at least 1 1/2" of thread. Length is measured from under the head.

 For technical drawings and 3-D models, click on a part number.

### 18-8 Stainless Steel

Lg.	Pkg. Qty.		Pkg.
<b>8-32</b>			
4"	10	<a href="#">91783A213</a>	\$9.10
<b>10-24</b>			
4"	10	<a href="#">91783A261</a>	5.86
5"	5	<a href="#">91783A265</a>	9.50
<b>10-32</b>			
4"	10	<a href="#">91783A846</a>	5.86

