


6-2. Construction

A wax-pellet type thermostat is used for this engine. The "wax-pellet" type is the description given to a quantity of wax in the shape of a small pellet. When the temperature of

the cooling water rises, the wax melts and its volume expands. The valve is opened or closed by this variation of volume.

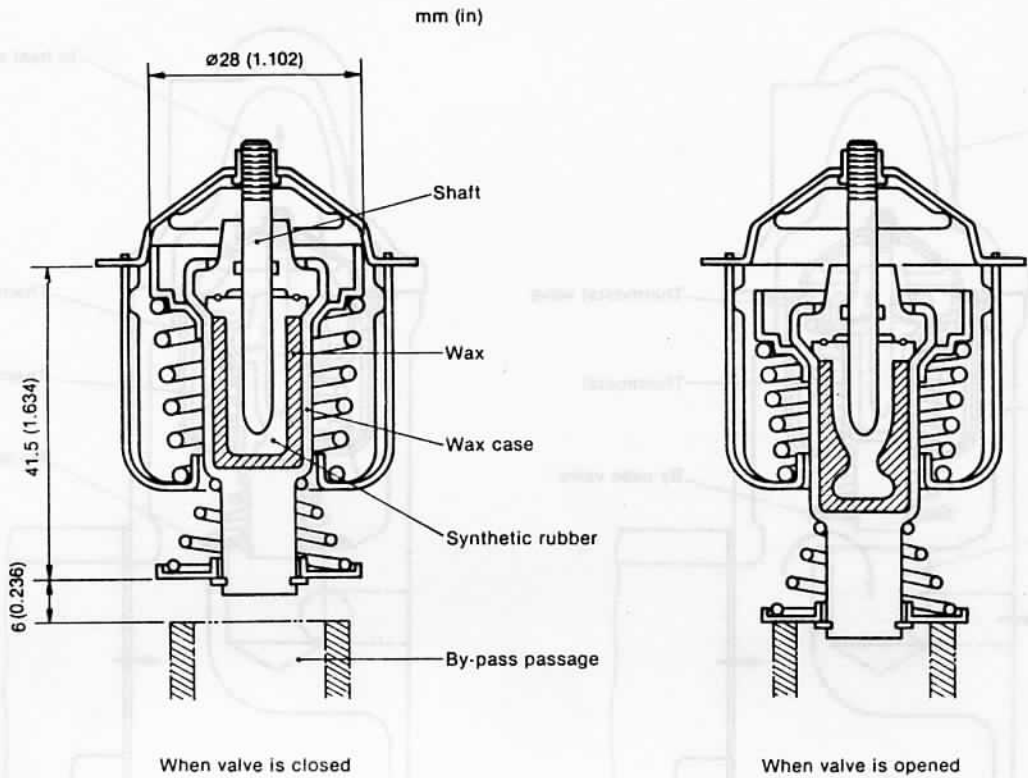

Thermostat operating temperature		°C (°F)
Opening temperature		71° (159.8)
Full open temperature (Temperature corresponding to 8mm or more valve lift)		85° (185)

Characteristic of Thermostat

